


Note:

- All IC's except IC1 use + / - supply rails
- C38 C39 can be electrolytics
- RX Fosc ~ 11,13 KHz
- TX Colpitts Fosc ~ 10,15 KHz
- C1,C2,C15 must be MKS like WIMA series
- WIMA capacitors series recommended for all caps values in nF
- LCC, MKP and MKT caps are T°C unstables.
- All Res: Metal film resistors (couche metallique in french)

You can add or not the pot in audio stage (220 ~ 470 Ohms) to control the header volume (very useful for me).

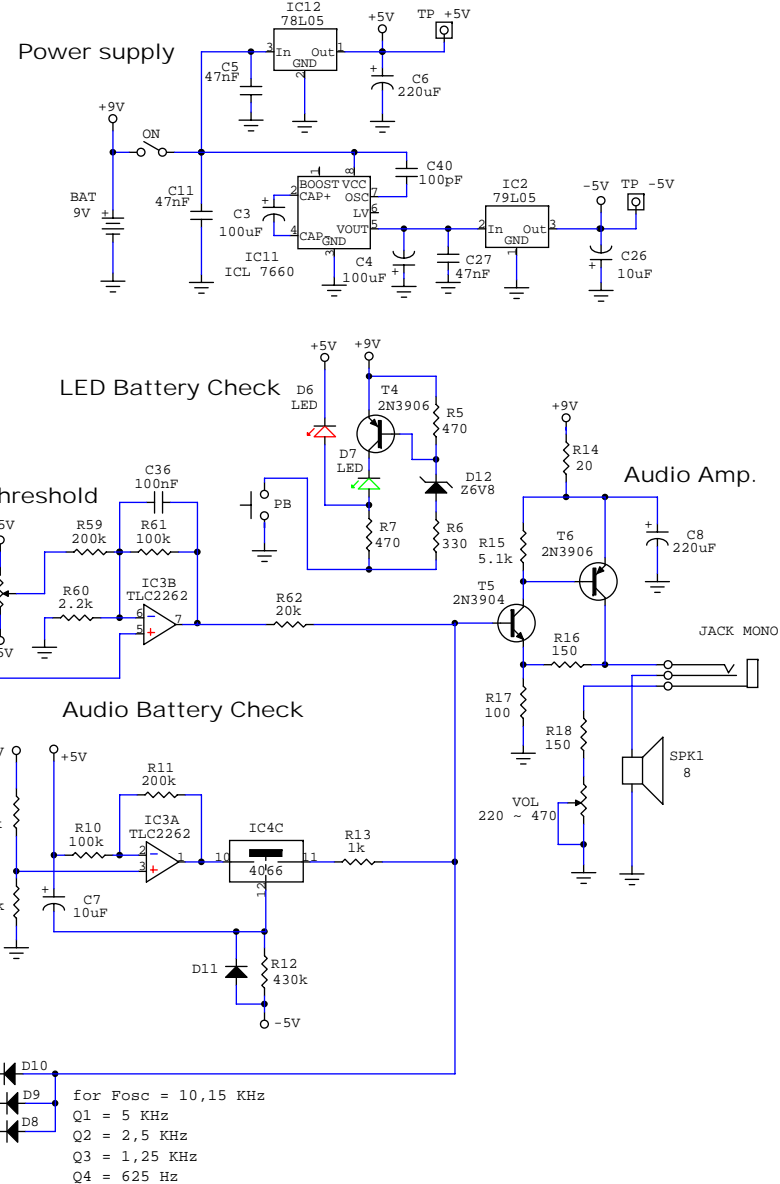

Traced by Driscoll  
 Source: Carl's schematics - Gary's components values

Tesoro Bandido II

Rev	ID
2	Complete schematic

Date: 27 SEPTEMBER 2004

Page: 1 of 1